


Arrestor Magazine, Loaded

Issue 2

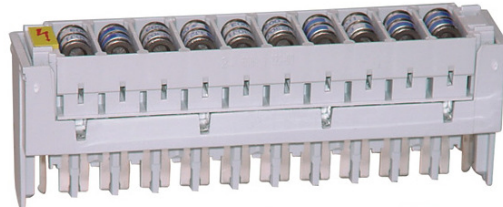

ADC offers a range of over voltage protection for the LSA-PLUS/ LSA Profile Series 2 Connection and Disconnection modules, in the form of plug in magazines fitted with 3-pole Gas Discharge Tubes (GDT). In addition to the primary protection afforded by the GDT, additional thermal fail-safe functionality may be fitted, to protect against overheating from interference currents, e.g. power crossing.

The magazines are inserted fully into the contacts of the Connection or Disconnection module, ensuring that the clamps on the sides of the modules grip the lugs of the back mount frame or the earth clips of the profil rails. Connection to LSA PROFILE Disconnection and Connection modules and rails is via the earth contact clips (P/N: 6089 3 202-00).

When used with ADC KRONE Series 2 Disconnection or Connection modules, the surge capacity is rated at 5kA per wire. If the magazine is inadvertently omitted, a unique design feature renders the Series 2 switching module inoperative until the protection is reinstated.

When used with ADC KRONE Series 2 Connection modules, the capacity is rated at 10kA per wire.

Features:

- The 3-pole gas discharge tubes will normally recover after a rated surge passes
- The optional fail safe 3-pole gas discharge tubes will open circuit to a fail safe state if there is a sustained power surge (must be inspected and replaced to restore service)

SPEC SHEET



www.adckrone.com/sg

Arrestor Magazine, Loaded

Specifications

General:



Environment for use: Indoors, in dry closed rooms
 Maximum relative humidity: ≤93% non-condensing
 Storage temperature range: -40° to +80°C
 Operation temperature range: -20° to +60°C
 Flammability rating of plastic housing: UL 94 V-0
 No. of magazine insertion cycles: typically ≥200
 Dimensions: 40.6(L) x 113(W) x 22.3(H) mm

Arrestor:

Mechanical characteristics: sinusoidal wave acc. To IEC 68-2-6
 Climatic characteristics: DIN IEC 68 part2-2/3 (thermal resistivity)
 DIN IEC 68 part2-1 (cold resistivity)
 Insulation resistance: ≥1000MΩ at 100VDC
 DC spark-over voltage: 180-300V
 Impulse spark-over voltage (1kV/μs)(a/b-e) ¹⁾ : <900V
 Nominal arrestor alt. discharge current (a/b-e) ²⁾ : 5Arms
 Nominal arrestor surge current (8/20μs) (a/b-e) ²⁾ : 5kA
 Transverse time (1kV/μs): <200ns
 Fail-safe response time: <5s (5A)
 Typical capacitance (a/b-e, a-b @ 1MHz): <3pF

RoHS compliant

- 1) For 99% of all measuring values
- 2) According to ITU-T K12

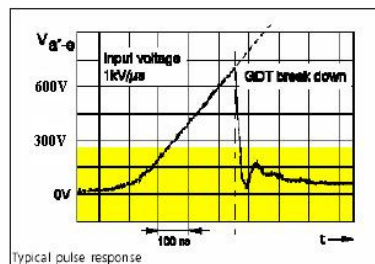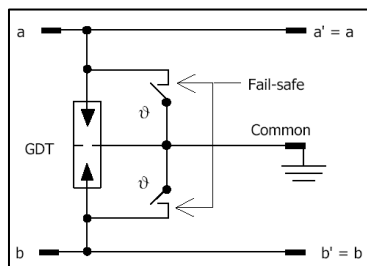

SPEC SHEET

Ordering Information

Description	Quantity	Product No.
Arrestor Magazine, Loaded, 3-pole, 230V	Each (packed in a box of 10)	S6089 2 023-08



www.adckrone.com/sg

SINGAPORE 100 Beach Road #18-01 Shaw Tower, Singapore 189702

INDONESIA
Ph: +62 21 520 0231, Fax: +62 21 522 1312
PHILIPPINES
Ph: +63 2 848 9901, Fax: +63 2 848 9904
THAILAND
Ph: +662 512 3688, Fax: +662 512 4747

MALAYSIA
Ph: +603 2615 0146, Fax: +603 2615 0147
SINGAPORE
Ph: +65 6394 3800, Fax: +65 6297 5035
VIETNAM
Hanoi: Ph: +844 934 3968, Fax: +844 934 3956
 HCMC: Ph: +848 8219 225, Fax: +848 8219 181

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101
 Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

S6089 2 023-08 / Issue 2 © 2011 ADC Telecommunications, Inc. All Rights Reserved.