


TrueNet[®]

Outdoor Loosetube Optical Cable, Non-Armoured, HDPE Sheath

Issue 1

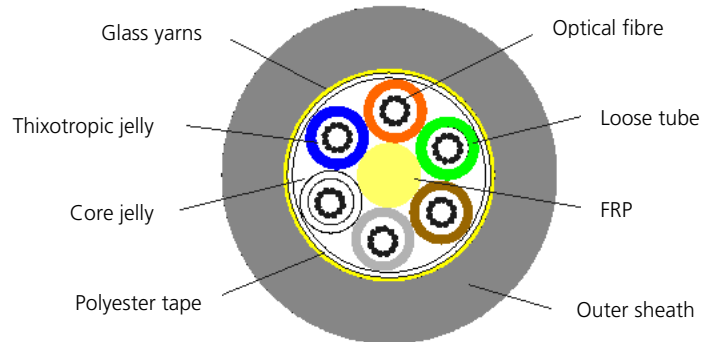

This cable is constructed of loose tubes and fillers (if required).

The elements are SZ stranded around a non-metallic central strength member (FRP) and are retained by two, contra-helically applied binders.

The loose tubes manufactured from high strength, low shrinkage PBT compound, and contain the optical fibres (the fibre colour sequence shown in Table 1). The loose tubes also contain a thixotropic jelly, to prevent water penetration and protect the fibres against shock.

The filler elements are manufactured from black PE to the same outside diameter as the loose tubes. The cable core is filled with a jelly to prevent ingress of water and the core is wrapped with a longitudinally applied polyester tape, retained with a helical binder.

For mechanical performance, glass yarns are positioned over the polyester tape, and then the cable is sheathed with a U.V. stabilised HDPE compound with nominal thickness of 1.8mm.

Features:

- Each fibre is uniquely colour coded as defined in Table 1
- RoHS compliant

Compliances:

- ISO/IEC 11801, Types OS1, OM1, OM2 and OM3
- IEC 60794-1-2 Testing Methods
- ITU-T Recommendations G.652.D (Low water Peak) for OS1 singlemode
- ITU-T Recommendations G.651 for OM1, OM2 and OM3
- AS/ACIF S008 and AS/NZS 3080

SPEC SHEET

Specifications

General:

Cable diameter:	11.7mm
Bend radius:	≥ 20 x Cable Diameter (Dynamic) ≥ 10 x Cable Diameter (Static)
Central strength member:	2.7mm diameter
Tensile strength:	2700N (Short term) 810N (Long term)
Approx cable weight:	112kg/km
Crush resistance:	1100N/10cm
Operating temperature:	-40 to +70°C
Drum length:	2000m (-0, +5%)

Singlemode:

Material:	Silica/Germanium doped silica
Index Profile:	Step Index, Matched Cladding
Cladding diameter:	125±1µm
Cladding Non-Circularity error:	<0.7%
Core / Cladding concentricity error:	≤0.3µm
Mode Field Diameter @ 1310nm:	9.2±0.4µm
Maximum attenuation (un-cabled):	≤0.35db/km @1310nm ≤0.22db/km @1550nm
Maximum attenuation (loosetube cabled):	≤0.36db/km @1310nm ≤0.22db/km @1550nm
Chromatic dispersion:	≤3.5ps/(nm.km) In the range 1170 to 1280nm ≤18ps/(nm.km) at 1550nm
Cut-off wavelength "λ _c ":	1170 to 1280nm
Cabled cut-off wavelength "λ _{cc} ":	≤ 1260nm
Zero dispersion wavelength (λ _o):	1302 to 1322ps/(nm ² .km)
Zero Dispersion Slope (S _o):	≤ 0.093ps/(nm ² .km)
Polarisation mode dispersion coefficient (PMD):	≤ 0.5ps/km
Effective Group Index:	1.4675@1310nm 1.4681@1550nm

Multimode 62.5µm OM1:

Material:	Doped Silica / Silica
Index Profile:	Graded Index
Core diameter:	62.5±3µm
Core Non-Circularity error:	≤5%
Cladding diameter:	125±2µm
Cladding Non-Circularity error:	≤2%
Core / Cladding concentricity error:	≤1µm
Coating/Cladding concentricity:	≤12µm
Maximum attenuation (un-cabled):	≤3.0db/km @850nm ≤0.70db/km @1300nm
Maximum attenuation (indoor cabled):	≤3.5db/km @850nm ≤1.5db/km @1300nm
Zero dispersion wavelength (λ _o):	1343±11nm
Zero Dispersion Slope (S _o):	≤ 0.097ps/(nm ² .km)
Numerical aperture:	0.275±0.015
Bandwidth:	≥200Mhz.km @ 850nm ≥500Mhz.km @ 1300nm
Effective group index:	1.496 @ 850nm 1.491 @ 1300nm

Multimode 50µm OM2:

Material: Doped Silica / Silica
 Index Profile: Graded Index
 Core diameter: 50±3µm
 Core Non-Circularity error: ≤5%
 Cladding diameter: 125±2µm
 Cladding Non-Circularity error: ≤2%
 Core / Cladding concentricity error: ≤1µm
 Coating/Cladding concentricity: ≤12µm
 Maximum attenuation (un-cabled): ≤2.5db/km @850nm
 ≤0.80db/km @1300nm
 Maximum attenuation (indoor cabled): ≤3.5db/km @850nm
 ≤1.5db/km @1300nm
 Zero dispersion wavelength: 1310±10nm
 Zero Dispersion Slope: ≤ 0.101ps/(nm².km)
 Numerical aperture): 0.200±0.015
 Bandwidth: ≥500Mhz.km @ 850nm overfilled LED
 ≥500Mhz.km @ 1300nm overfilled LED
 Effective group index: 1.482 @ 850nm
 1.477 @ 1300nm

Multimode 50µm OM3:

Material: Doped Silica / Silica
 Index Profile: Graded Index
 Core diameter: 50±3µm
 Core Non-Circularity error: ≤5%
 Cladding diameter: 125±2µm
 Cladding Non-Circularity error: ≤2%
 Core / Cladding concentricity error: ≤1µm
 Coating/Cladding concentricity: ≤12µm
 Maximum attenuation (un-cabled): ≤2.5db/km @850nm
 ≤0.80db/km @1300nm
 Maximum attenuation (indoor cabled): ≤3.5db/km @850nm
 ≤1.5db/km @1300nm
 Zero dispersion wavelength: 1310±10nm
 Zero Dispersion Slope: ≤ 0.101ps/(nm².km)
 Numerical aperture): 0.200±0.015
 Bandwidth: ≥1500Mhz.km @ 850nm overfilled LED
 ≥500Mhz.km @ 1300nm overfilled LED
 ≥2000Mhz.km @ 850nm Laser
 Effective group index: 1.482 @ 850nm
 1.477 @ 1300nm

Table 1 – Colour coding of the Buffered Fibres

Element No.	1	2	3	4	5	6
Colour	Blue	Orange	Green	Brown	Grey	White
Element No.	7	8	9	10	11	12
Colour	Red	Black	Yellow	Violet	Pink	Aqua

Ordering Information

Description	Quantity	Colour	Product No.
Outdoor 62.5µm OM1 Multimode Non-Armoured Loosetube HDPE Cable, 4-core	Per metre	Black	Q004LTSDNA062AP
Outdoor 62.5µm OM1 Multimode Non-Armoured Loosetube HDPE Cable, 6-core	Per metre	Black	Q006LTSDNA062AP
Outdoor 62.5µm OM1 Multimode Non-Armoured Loosetube HDPE Cable, 8-core	Per metre	Black	Q008LTSDNA062AP
Outdoor 62.5µm OM1 Multimode Non-Armoured Loosetube HDPE Cable, 12-core	Per metre	Black	Q012LTSDNA062AP
Outdoor 62.5µm OM1 Multimode Non-Armoured Loosetube HDPE Cable, 24-core	Per metre	Black	Q024LTSDNA062AP
Outdoor 50µm OM2 Multimode Non-Armoured Loosetube HDPE Cable, 4-core	Per metre	Black	Q004LTSDNA050AP
Outdoor 50µm OM2 Multimode Non-Armoured Loosetube HDPE Cable, 6-core	Per metre	Black	Q006LTSDNA050AP
Outdoor 50µm OM2 Multimode Non-Armoured Loosetube HDPE Cable, 8-core	Per metre	Black	Q008LTSDNA050AP
Outdoor 50µm OM2 Multimode Non-Armoured Loosetube HDPE Cable, 12-core	Per metre	Black	Q012LTSDNA050AP
Outdoor 50µm OM2 Multimode Non-Armoured Loosetube HDPE Cable, 24-core	Per metre	Black	Q024LTSDNA050AP
Outdoor 50µm OM3 Multimode Non-Armoured Loosetube HDPE Cable, 4-core	Per metre	Black	Q004LTSDNA050UAP
Outdoor 50µm OM3 Multimode Non-Armoured Loosetube HDPE Cable, 6-core	Per metre	Black	Q006LTSDNA050UAP
Outdoor 50µm OM3 Multimode Non-Armoured Loosetube HDPE Cable, 8-core	Per metre	Black	Q008LTSDNA050UAP
Outdoor 50µm OM3 Multimode Non-Armoured Loosetube HDPE Cable, 12-core	Per metre	Black	Q012LTSDNA050UAP
Outdoor 50µm OM3 Multimode Non-Armoured Loosetube HDPE Cable, 24-core	Per metre	Black	Q024LTSDNA050UAP
Outdoor 9µm Singlemode Non-Armoured Loosetube HDPE Cable, 4-core	Per metre	Black	Q004LTSDNA010AP
Outdoor 9µm Singlemode Non-Armoured Loosetube HDPE Cable, 6-core	Per metre	Black	Q006LTSDNA010AP
Outdoor 9µm Singlemode Non-Armoured Loosetube HDPE Cable, 8-core	Per metre	Black	Q008LTSDNA010AP
Outdoor 9µm Singlemode Non-Armoured Loosetube HDPE Cable, 12-core	Per metre	Black	Q012LTSDNA010AP
Outdoor 9µm Singlemode Non-Armoured Loosetube HDPE Cable, 24-core	Per metre	Black	Q024LTSDNA010AP

SPEC SHEET



www.adckrone.com/sg

SINGAPORE 100 Beach Road #18-01 Shaw Tower, Singapore 189702

INDONESIA

Ph: +62 21 520 0231, Fax: +62 21 522 1312

PHILIPPINES

Ph: +63 2 848 9901, Fax: +63 2 848 9904

THAILAND

Ph: +662 512 3688, Fax: +662 512 4747

MALAYSIA

Ph: +603 2615 0146, Fax: +603 2615 0147

SINGAPORE

Ph: +65 6394 3800, Fax: +65 6297 5035

VIETNAM

Hanoi: Ph: +844 934 3968, Fax: +844 934 3956

HCMC: Ph: +848 8219 225, Fax: +848 8219 181

ADC Telecommunications, Inc., P.O. Box 1101, Minneapolis, Minnesota USA 55440-1101

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting our headquarters office in Minneapolis. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents. Products or features contained herein may be covered by one or more U.S. or foreign patents. An Equal Opportunity Employer

Q0XXLTSDNAXXXAP / Issue 1 © 2008 ADC Telecommunications, Inc. All Rights Reserved.